

# Crystal tci TF38/26




- Feature**
- ⊙ High stability
  - ⊙ High vibration and shock resistance.
  - ⊙ Low cost.
  - ⊙ Automatic and perfect packing Due to emboss taping.

## Specifications

ITEM	TYPE	tci TF38/26
Frequency (KHz)		32.768, or specify
Equivalent series resistance		30-100K $\Omega$
Frequency tolerance		$\pm 15\text{ppm} \sim \pm 100\text{ppm}$
Operating temp. range		-10~+60 $^{\circ}\text{C}$ , -20~+70 $^{\circ}\text{C}$ (standard) , or specify
Load capacitance (pF)		12.5pF, or specify
Drive level		1 $\mu\text{W}$
Shunt capacitance		<1.8pF

## dimensions (mm)

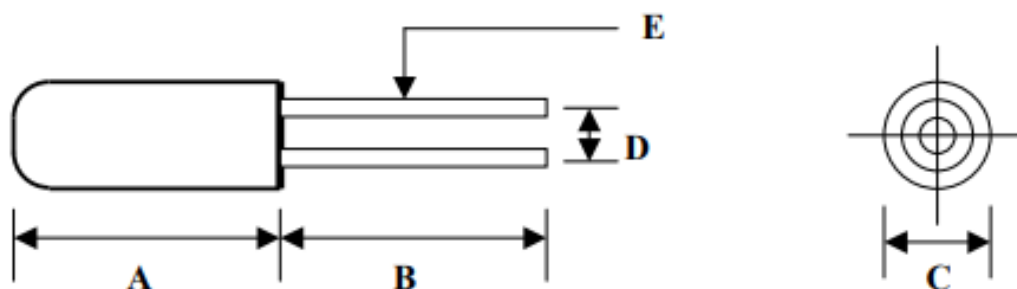

TYPE	A	B	C	D	E
TF38	8.3 Max	10.5	3.0 Max	1.1	$\phi 0.35$
TF26	6.3 Max	6	2.0 Max	0.7	$\phi 0.25$